



Bipo bone shaped oD without wire // Fibre concrete

Item No.	Type	CC	L	pcs./	pcs./
		mm	mm	bag	pal.
22175	Bipo 20/25/30 oD	20/25/30	20	1.000	32.000
22176	Bipo 25/30/35/40 oD	25/30/35/40	22	500	16.000
22177	Bipo 35/40/45/50 oD	35/40/45/50	24	250	8.000
22178	Bipo 45/55/60 oD	45/55/60	24	200	6.400
221781	Bipo 55/60/65/70 oD	55/60/65/70	28	175	5.600

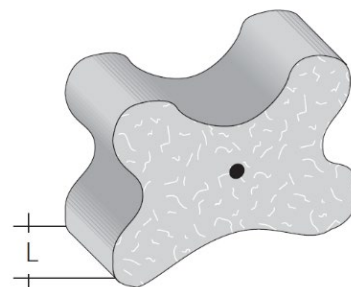

Example: Bipo 25/30/35/40

Bipo bone shaped:
universal use for
three and four
heights!

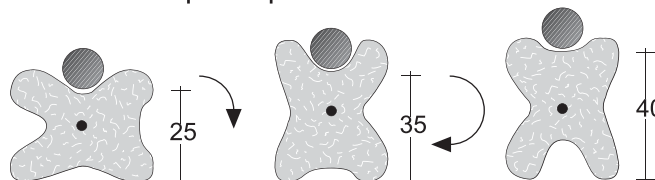

The Bipo bone shaped oD without wire can be mounted on horizontal reinforcement. The bone shape allows three/four different concrete cover heights.

Material-characteristics:

Labeling according to DBV	DBV-c-L2-F-T-A-D
Concrete compressive strength	ca. 50 N/mm ²
Bulk density	2,1 - 2,3 kg/dm ³
Building material class	A1

Technical changes reserved.