

Quick Dreika K triangular profile, concave Fibre concrete spacers




Technical Data Sheet

May 2024

Dreika K | triangular profile , concave L = 120 cm // Fibre concrete

Art-Nr.	Typ	CC	L	m
		mm	mm	pal
223243	Dreika 25 K, L = 120 cm	25	1200	1394,40
223241	Dreika 30 K, L = 120 cm	30	1200	1195,20
223251	Dreika 35 K, L = 120 cm	35	1200	924,00
223261	Dreika 40 K, L = 120 cm	40	1200	678,00
223271	Dreika 45 K, L = 120 cm	45	1200	597,60
223281	Dreika 50 K, L = 120 cm	50	1200	498,00
223291	Dreika 55 K, L = 120 cm	55	1200	398,40
223301	Dreika 60 K, L = 120 cm	60	1200	298,80
223311	Dreika 70 K, L = 120 cm	70	1200	270,00
223321	Dreika 80 K, L = 120 cm	80	1200	210,00
223331	Dreika 90 K, L = 120 cm	90	1200	144,00
223341	Dreika 100 K, L = 120 cm	100	1200	132,00

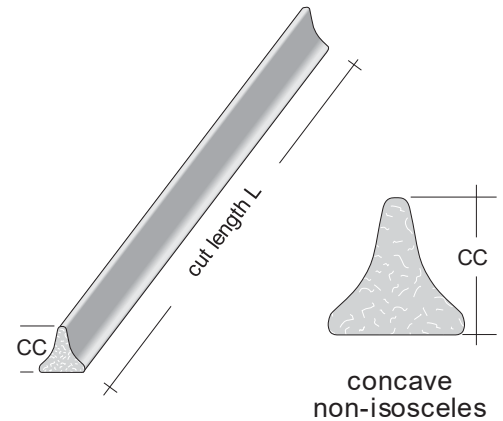

The Dreika K is a surface spacer and is predominantly used in areas such as floor slabs, foundations, etc., with horizontal reinforcement. The contact surface is either smooth.

The Dreika K is highly loadable. It is suitable for use with heavy reinforcement and in areas where high traffic loads occur.

Material-characteristics:

Labeling according to DBV	DBV-c-L2-F-T-A-D
Concrete compressive strength	approx. 50 N/mm ²
Building material class	A1

Technical changes reserved.

Quick Bauprodukte GmbH, Westendamm 3, 58239 Schwerte, GERMANY

www.quick-bauprodukte.com; Mail: info@quick-bauprodukte.de; Phone: +49(0)23049814310

PAGE: 1